



DIGITAL *SOLUTIONS*

PROFESSIONAL AUDIO VISUAL
SYSTEMS PRODUCER



ABOUT US

We are a digital solutions provider and system integrator with multidisciplinary experiences. Over the past 15 years, we have worked with various partners and clients from conceptualization to planning, design, and implementation stages.

With a proven track record, we have completed over 500 projects covering a wide variety of applications from display and audio solutions, training and simulations, automation and control, digital signage, streaming and recording, interactive system design and consultation, and projection-mapping to custom projects.

Pro AV
SYSTEM
INTEGRATOR

COMPLETED
500+
PROJECTS


EXPERIENCE
since
2008

TRUSTED ACROSS
APAC
REGION

CERTIFIED
bizSAFE

STATE-OF-THE-ART
LED
MANUFACTURER

Digital Solutions Indoor LED **TRANSPARENT TR SERIES**

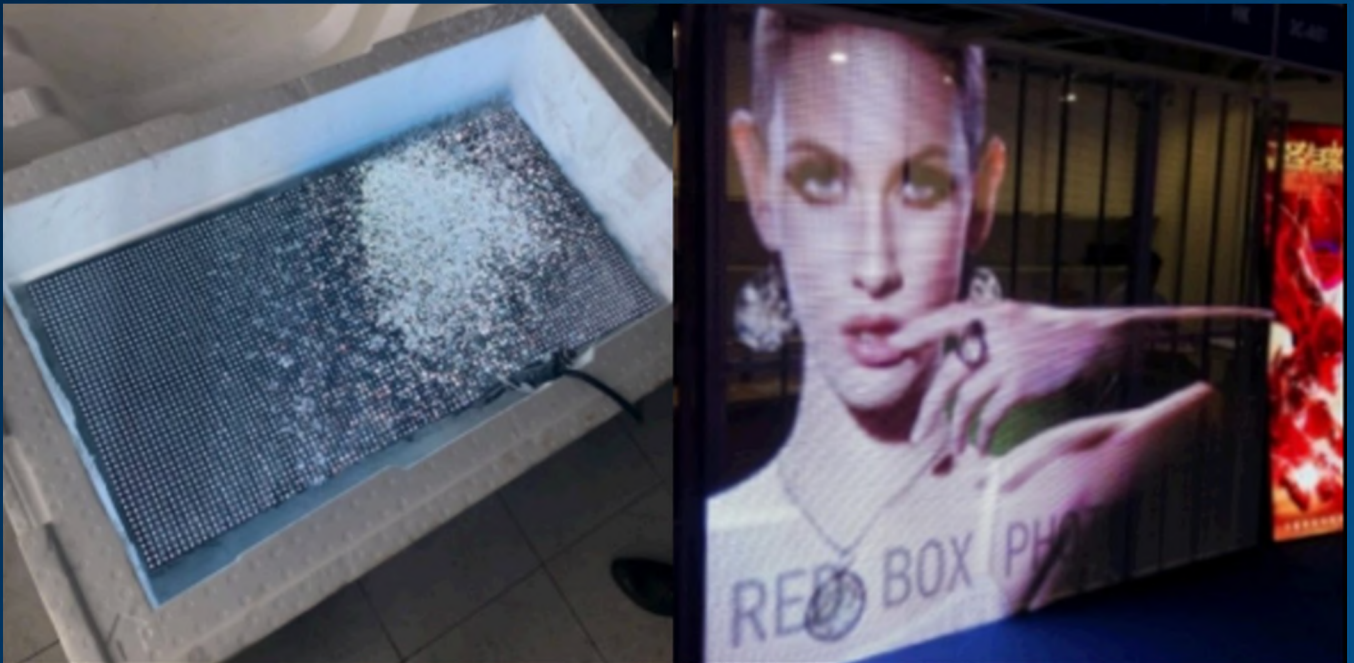

FEATURES

- Cost effective model
- Cabinet can be in Aluminium or Steel
- Front side: IP67, Rear side: IP54
- Reliable and Stable
- Size: 960 x 960mm
- Quick and Simple connection between Cabinets
- Customisable to suit different requirement

APPLICATIONS

- Advertisements
- Retail Malls
- Banks & Financial
- Hotels & Conferences
- Government & Public Sectors
- Cinemas & Entertainment

** Specifications subjected to changes without prior notice

Digital Solutions Indoor LED

TR SERIES SPECIFICATION

ITEMS	TR 3-7	TR 10.0
Pixel Pitch	3.9(H) - 7.8(V)	10.41
Application	Outdoor Usage	
Module Resolution (H x V dot)	128 x 8	46 x 6
Module Size (H x V mm)	500 x 62.5	
Module Maintenance Method	Rear Access	
Cabinet Resolution (H x V dot)	256 x 64	96 x 48
Cabinet Size (H x V x D mm)	1000 x 500 x 80	
Cabinet Material	Aluminium	
Cabinet Weight (kg / pcs)	7.5	
IP Standard (Front / Back)	IP65 / IP54	
Density (Pixels / m2)	32,768	9,216
Brightness (nits)	0 - 4500	0 - 5000
Brightness Adjustment Level	256	
Viewing Distance (m)	≥ 4	≥ 10
Color Temperature (k)	3000 - 12000	
Grey Scale (bits)	13 - 16	
Refresh Rate (hz)	≥ 2880	
Frame Rate (hz)	50/60	
Viewing Angle (H x V)	110°/110°	
Max. Consumption (w / sqm)	800	
Avg. Consumption (w / sqm)	265	
Driving Mode (scan)	1/8	1/2
Working Humidity	10% - 90% RH	
Working Temperature	-20°C ~ +50°C	
Storage Temperature	-40°C ~ +85°C	
Power	AC 110/220, 50/60Hz	
Flatness Level (mm)	≤ 0.2	
Life Span (Hours)	≥ 100000	
Inputs	DVI, VGA, HDMI, SDI, YPrPb, CVBS	
File types	Text, Animations, Picture, Videos	



DIGITAL SOLUTIONS

unlocking
possibilities



+65 6287 2943



www.digitalsolutionsasia.com



sales@digitalsolutionsasia.com



23 New Industrial Road, #03-06,
Solstice Business Centre,
Singapore 536209